



# OG-300 Solar Water Heating System Certification

**No./30004381**

Issued: December 15, 2023

Expiration Date: November 01, 2024

[www.solar-rating.org](http://www.solar-rating.org) | (800) 423-6587 | (562) 699-0543

<p><b>CERTIFICATION HOLDER:</b>  <b>Heliodyne, Inc.</b>          4910 Seaport Avenue          Richmond, CA 94804 USA  <a href="http://www.heliodyne.com">www.heliodyne.com</a></p>	<p><b>EVALUATION SUBJECT</b></p> <p><b>BRAND:</b> HELIOPAK</p> <p><b>MODEL:</b> HPAK 1 406 GT 65 ACD Z</p> <p><b>TYPE:</b> Pumped, Indirect</p>
--	---

**PRODUCT CERTIFICATION SYSTEM:**

The ICC-SRCC OG-300 system certification program includes evaluation and performance ratings for solar water heating systems as established in the *ICC-SRCC Rules for Solar Heating & Cooling Product Listing Reports*. The program also includes periodic factory inspections and surveillance of the manufacturer’s quality management system.

**COMPLIANCE WITH THE FOLLOWING STANDARD(S):**

*ICC 900/SRCC 300 - 2020, Solar Thermal System Standard  
 ENERGY STAR Residential Water Heater Specification (v.5.0)*


**SOLAR UNIFORM ENERGY FACTOR (SUEF):**

99.0, Low Draw Pattern

The Solar Uniform Energy Factor (SUEF) is determined through computer modeling per the specification established in *ICC 900/SRCC 300, Appendix B*.

**INSTALLATION:**

The solar water heating system must be installed in accordance with the manufacturer’s published installation instructions. Installation must conform to the requirements of the applicable code and is subject to approval by the code official having jurisdiction. This certification is valid only for a system composed of the components configured as shown in the schematic below:

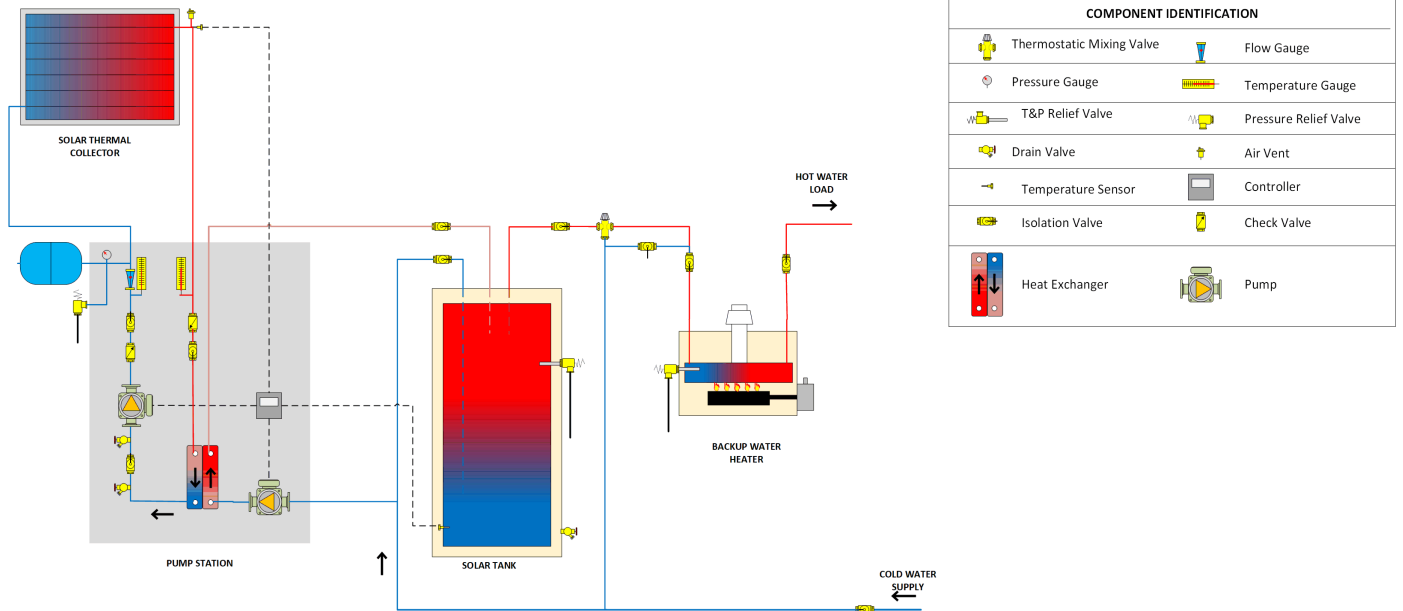

**PARTS LIST:**

Part	Quantity	Evaluated Component
Collector Option 1	1	Heliodyne, Inc. Model 406 001 (OG-100 2010115C)
Solar Tank	1	State Model SBV-65-1OTS (246 L volume)

**IDENTIFICATION:**

Certified systems must be identified with the OG-300 certification mark below in accordance with the *Rules for Certification Mark and Certificate Use* and labeled in with the information below per *ICC 900/SRCC 300*:



1. Manufacturer’s name and model number.
2. OG-300 system certification number
3. OG-100 collector certification number(s) and quantity.
4. Heat transfer fluid and concentration range.
5. Storage and expansion tank volumes.
6. Relief valve specification and setpoint.
7. Maximum water supply pressure.
8. Maximum solar loop pressure.
9. Flow rate range (where a flow meter is installed).
10. Backup energy rating. For electrical, phase/volts/amps. For gas, minimum pressure.
11. Installation date field (to be entered by the installer in the field).

**CONDITIONS:**

The certified solar water heating system must comply with the following conditions:

1. Systems must be installed and operated in accordance with the manufacturer’s instructions and local code.
2. Systems must include all components installed in the configuration shown in the schematic in the OG-300 certification document.
3. Systems must use one of the OG-100 certified solar collector options from the list above. Where more than one collector is installed in a system, all collectors must be the same model.
4. Systems must utilize heat transfer fluids approved by the manufacturer.
5. Certifications are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use.
6. There is no warranty by ICC-SRCC express or implied, as to any finding or other matter in this certification, or as to any product covered by the certification.

**REGIONAL RATINGS:**

Thermal performance ratings are provided for the system based on computer modeling to standard OG-300 rating conditions and a hot water load of 64.3 gallons per day (243.4 litres per day) at a setpoint of 125°F (51.7°C) for comparison. Performance is given using the following values:

- Annual Solar Fraction (SF<sub>A</sub>): The portion of the total conventional hot water heating load (including tank standby losses) provided by solar energy averaged over one year.
- Annual Energy Savings (AES): The projected energy savings over a period of one year for the system compared to a baseline tank-type water heater using the same fuel source.

Results are given for several climate zones throughout North America. Climate zones are as established in *ANSI/ASHRAE 169, Climatic Data for Building Design Standard*. Actual thermal performance and energy savings for an installed system will vary with local conditions, installation details and hot water usage.

# UNITED STATES OF AMERICA

## OG-300 LOCAL ANNUAL SOLAR WATER HEATING SYSTEM PERFORMANCE

System performance at several geographic locations in the United States corresponding to climate zones as established in ASHRAE 169 is provided below. Ratings are determined using weather data, solar irradiance and water supply temperature over a period of one year for the specific locations listed below. Ratings for locations in California and Hawaii are provided on separate state maps on the following pages.



USA			
Location	Climate Zone (ASHRAE 169)	Solar Fraction (SF <sub>A</sub> )	Annual Energy Savings (kWh)
AK - Anchorage	7	0.36	2850
AZ - Phoenix	2B	0.81	4430
CO - Denver	5B	0.61	4220
FL - Tampa	2A	0.74	3900
GA - Atlanta	3A	0.63	3870
MA - Boston	5A	0.52	3530
MO - St Louis	4A	0.57	3680
MT - Helena	6B	0.50	3730
TX - Dallas-Fort Worth	3A	0.68	3950
WA - Seattle	4C	0.47	3180
WI - Milwaukee	6A	0.49	3500

# STATE OF CALIFORNIA

## OG-300 LOCAL ANNUAL SOLAR WATER HEATING SYSTEM PERFORMANCE

System performance at several geographic locations in the state of California corresponding to building climate zones as established by the California Energy Commission (CEC) is provided below. Ratings are determined using weather data, solar irradiance and water supply temperature over a period of one year for the specific locations listed below.



State of California			
Location **	Climate Zone (ASHRAE 169)*	Solar Fraction (SF <sub>A</sub> )	Annual Energy Savings (kWh)
CCZ 1 - Arcata	7	0.50	3410
CCZ 2 - Santa Rosa	6B	0.64	4130
CCZ 3 - Oakland	3C	0.64	4120
CCZ 4 - Sunnyvale	4C	0.67	4240
CCZ 5 - Santa Maria	5C	0.67	4370
CCZ 6 - Los Angeles	3B	0.70	4180
CCZ 7 - San Diego	3B	0.70	4170
CCZ 8 - El Toro	3B	0.72	4330
CCZ 9 - Burbank	3B	0.71	4350
CCZ 10 - Riverside	3B	0.74	4400
CCZ 11 - Red Bluff	3B	0.68	4100
CCZ 12 - Sacramento	3B	0.69	4230
CCZ 13 - Fresno	3B	0.72	4320
CCZ 14 - China Lake	3B	0.78	4480
CCZ 15 - El Centro	3B	0.82	4340
CCZ 16 - Mt. Shasta	7	0.60	4090


\* Climate zones are as established in ANSI/ASHRAE 169, Climatic Data for Building Design Standard.

\*\* California Building Climate Zones and representative cities are established by the California Energy Commission for use in the CA Title 24 Energy Efficiency Standards

# HAWAIIAN ISLANDS

## OG-300 LOCAL ANNUAL SOLAR WATER HEATING SYSTEM PERFORMANCE

System performance at several geographic locations in the Hawaiian Islands corresponding to climate zones as established in ASHRAE 169 is provided below. Ratings are determined using weather data, solar irradiance and water supply temperature over a period of one year for the specific locations listed below.

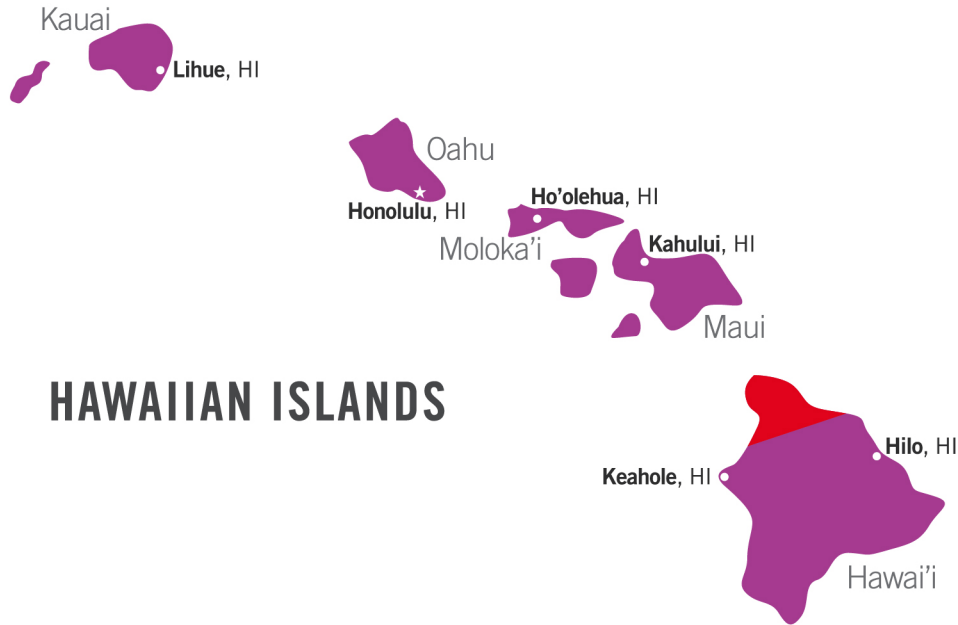

State of Hawaii			
Location	Climate Zone (ASHRAE 169)	Solar Fraction (SF <sub>A</sub> )	Annual Energy Savings (kWh)
Hawaii Island - Hilo	1	0.68	3500
Honolulu - Oahu Island	1	0.79	3900
Maui Island - Kahului	1	0.79	3910
Hawaii Island - Keahol	1	0.76	3960
Lihue - Kauai Island	1	0.74	3770
Ho'olehua - Molokai Island	1	0.78	3890

# CANADA

## OG-300 LOCAL ANNUAL SOLAR WATER HEATING SYSTEM PERFORMANCE

System performance at several geographic locations in Canada corresponding to climate zones as established in ASHRAE 169 is provided below. Ratings are determined using weather data, solar irradiance and water supply temperature over a period of one year for the specific locations listed below. The local annual ratings are provided for a 243 L/day (64.3 gal/day) hot water load.



Canada			
Location	Climate Zone (ASHRAE 169)	Solar Fraction (SF <sub>A</sub> )	Annual Energy Savings (kWh)
AB - Edmonton	5	0.48	3740
NS - Halifax	7A	0.44	3200
ON - Thunder Bay	7A	0.49	3540
QC - Quebec City	5	0.46	3510
MB - Winnipeg	7A	0.47	3710
AB - Calgary	7A	0.50	3860
BC - Vancouver	7	0.47	3280

# CENTRAL AMERICA AND CARIBBEAN REGION

## OG-300 LOCAL ANNUAL SOLAR WATER HEATING SYSTEM PERFORMANCE

System performance at several geographic locations in Central America and the Caribbean region corresponding to climate zones as established in ASHRAE 169 is provided below. Ratings are determined using weather data, solar irradiance and water supply temperature over a period of one year for the specific locations listed below.



Central America & Caribbean Region			
Location	Climate Zone (ASHRAE 169)	Solar Fraction (SF <sub>A</sub> )	Annual Energy Savings (kWh)
USVI - Charlotte Amalie	1	0.76	4100
Barbados - Christ Church	1	0.85	4100
Costa Rica - San Jose	1	0.73	4970
Jamaica - Kingston	1	0.87	4210
Mexico - Monterrey	2	0.59	3390
Mexico - Mexico City	2	0.61	4140
Belize - Belize City	1	0.75	3610
Puerto Rico - San Juan	1	0.73	3970